




PROTEZIONE "TURBO" "TURBO" PROTECTION

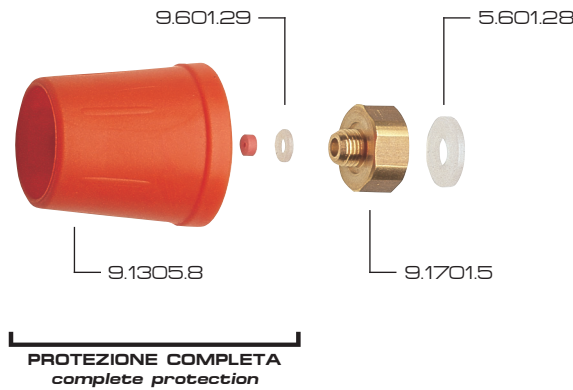

◀ PAGE 25/47 ▶

FORO mm	PRESTAZIONI	PRESSIONE						HOLE DIA. mm	PERFORMANCES	PRESSURE					
		15 bar		30 bar		50 bar				200 psi		450 psi		700 psi	
		cono	spillo	cono	spillo	cono	spillo			cone	straight	cone	straight	cone	straight
Ø 1.0	portata l/min angolo di spruzzo gittata max. m.	18 30° 2.1	23 - 5.0	26 35° 2.4	32 - 5.6	34 40° 2.8	4.1 - 6.3	Ø 1.0	capacity US/GPM spray angle max. throw ft.	0.44 30° 6.3	0.56 - 15.1	0.71 35° 8.1	0.87 - 19.0	0.87 40° 8.9	1.05 - 20.0
Ø 1.2	portata l/min angolo di spruzzo gittata max. m.	2.4 35° 2.3	3.0 - 5.8	3.4 40° 2.7	4.2 - 6.1	4.4 45° 3.1	5.4 - 6.8	Ø 1.2	capacity US/GPM spray angle max. throw ft.	0.58 35° 6.9	0.73 - 17.5	0.93 40° 9.2	1.15 - 20.7	1.12 45° 9.8	1.38 - 21.5
Ø 1.5	portata l/min angolo di spruzzo gittata max. m.	3.4 40° 2.6	4.5 - 6.6	4.8 45° 3.0	6.4 - 7.0	6.2 50° 3.5	8.3 - 7.7	Ø 1.5	capacity US/GPM spray angle max. throw ft.	0.83 40° 7.8	1.10 - 20.0	1.31 45° 10.2	1.78 - 23.8	1.59 50° 11.1	2.12 - 24.4
Ø 1.8	portata l/min angolo di spruzzo gittata max. m.	3.9 50° 2.9	6.9 - 7.0	5.5 55° 3.3	9.8 - 7.5	7.1 60° 4.0	12.7 - 8.3	Ø 1.8	capacity US/GPM spray angle max. throw ft.	0.95 50° 8.7	1.68 - 21.2	1.50 55° 11.2	2.68 - 25.5	1.81 60° 12.6	3.24 - 26.3
Ø 2.0	portata l/min angolo di spruzzo gittata max. m.	4.5 55° 3.1	8.3 - 7.5	6.3 60° 3.5	11.7 - 8.0	8.1 65° 4.5	15.1 - 8.9	Ø 2.0	capacity US/GPM spray angle max. throw ft.	1.10 55° 9.4	2.02 - 22.6	1.72 60° 11.9	3.20 - 27.2	2.07 65° 14.3	3.85 - 28.2
Ø 2.3	portata l/min angolo di spruzzo gittata max. m.	5.3 60° 3.4	11.4 - 8.0	7.5 65° 4.0	16.1 - 8.5	9.7 75° 4.8	20.8 - 9.3	Ø 2.3	capacity US/GPM spray angle max. throw ft.	1.29 60° 10.3	2.77 - 24.1	2.05 65° 13.6	4.40 - 28.9	2.47 75° 15.3	5.31 - 29.5

COME SI ORDINA / HOW TO ORDER

PROTEZIONE COMPLETA complete protection	Ø	SOLO PROTEZIONE protection only	SOLO UGELLO spray tip only	Ø	SOLO GUARNIZIONE gasket only
9.1312.2	1.0	9.1305.8	9.801.12	1.0	9.601.29
9.1312.3	1.2		9.801.13	1.2	
9.1312.1	1.5		9.801.14	1.5	
9.1312.4	1.8		9.801.15	1.8	
9.1312.5	2.0		9.801.16	2.0	
9.1312.6	2.3		9.801.17	2.3	